


# YWSW Series

## WaveRing® Imperial External

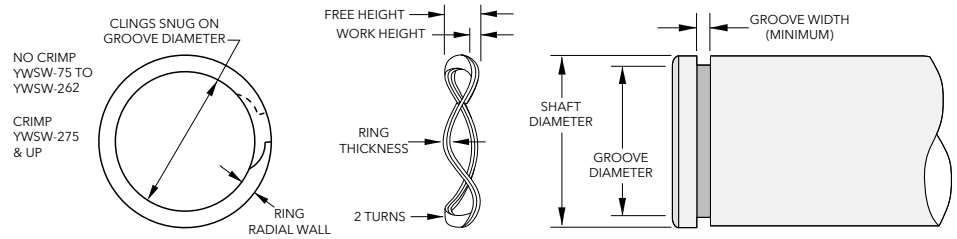

**Product Dimensions:** All dimensions in inches unless otherwise specified.

TFC Part Number		Shaft Diameter		Ring		Groove		Load (lb) @ Work Height	Max Free Height (in)	Number of Waves
Carbon Steel	Add Suffix	in	mm	Thickness (in)	Radial Wall (in)	Diameter (in)	Width (in)			
YWSW-75	-S17	0,750	19,05	0,042	0,065	0,704	0,120	25 @ 0,085	0,115	3
YWSW-87	-S17	0,875	22,23	0,042	0,075	0,821	0,136	30 @ 0,085	0,131	3
YWSW-100	-S17	1,000	25,40	0,042	0,085	0,940	0,134	34 @ 0,085	0,129	3
YWSW-112	-S17	1,125	28,58	0,050	0,128	1,059	0,142	38 @ 0,100	0,137	3
YWSW-125	-S17	1,250	31,75	0,050	0,128	1,176	0,150	40 @ 0,100	0,145	3
YWSW-137	-S17	1,375	34,93	0,050	0,128	1,291	0,135	45 @ 0,100	0,130	4
YWSW-150	-S17	1,500	38,10	0,050	0,128	1,406	0,131	50 @ 0,100	0,126	4
YWSW-162	-S17	1,625	41,28	0,062	0,158	1,529	0,143	55 @ 0,110	0,138	4
YWSW-175	-S17	1,750	44,45	0,062	0,158	1,650	0,142	60 @ 0,110	0,137	4
YWSW-187	-S17	1,875	47,63	0,062	0,158	1,769	0,145	63 @ 0,110	0,140	4
YWSW-200	-S17	2,000	50,80	0,062	0,158	1,886	0,150	65 @ 0,110	0,145	4
YWSW-212	-S17	2,125	53,98	0,078	0,188	2,003	0,175	70 @ 0,130	0,170	4
YWSW-225	-S17	2,250	57,15	0,078	0,188	2,120	0,180	75 @ 0,130	0,175	4
YWSW-237	-S17	2,375	60,33	0,078	0,188	2,239	0,180	80 @ 0,130	0,175	4
YWSW-250	-S17	2,500	63,50	0,078	0,188	2,360	0,176	84 @ 0,130	0,171	4
YWSW-262	-S17	2,625	66,68	0,078	0,188	2,481	0,190	88 @ 0,130	0,181	4
YWSW-275	-S17	2,750	69,85	0,093	0,225	2,602	0,222	94 @ 0,170	0,217	4
YWSW-287	-S17	2,875	73,03	0,093	0,225	2,721	0,222	97 @ 0,170	0,217	4
YWSW-300	-S17	3,000	76,20	0,093	0,225	2,838	0,230	100 @ 0,170	0,225	4
YWSW-312	-S17	3,125	79,38	0,093	0,225	2,957	0,235	103 @ 0,170	0,230	4
YWSW-325	-S17	3,250	82,55	0,093	0,225	3,076	0,230	106 @ 0,170	0,225	4
YWSW-350	-S17	3,500	88,90	0,111	0,281	3,316	0,250	115 @ 0,185	0,245	4
YWSW-362	-S17	3,625	92,08	0,111	0,281	3,435	0,255	117 @ 0,185	0,250	4
YWSW-375	-S17	3,750	95,25	0,111	0,281	3,552	0,263	121 @ 0,185	0,258	4
YWSW-387	-S17	3,875	98,43	0,111	0,281	3,673	0,260	126 @ 0,185	0,255	4
YWSW-400	-S17	4,000	101,60	0,111	0,281	3,792	0,273	130 @ 0,185	0,268	4
YWSW-412	-S17	4,125	104,78	0,111	0,281	3,919	0,268	134 @ 0,185	0,263	4
YWSW-425	-S17	4,250	107,95	0,111	0,281	4,065	0,253	140 @ 0,185	0,248	5
YWSW-450	-S17	4,500	114,30	0,111	0,281	4,310	0,261	150 @ 0,185	0,256	5
YWSW-475	-S17	4,750	120,65	0,111	0,281	4,550	0,258	160 @ 0,185	0,253	5
YWSW-500	-S17	5,000	127,00	0,111	0,281	4,790	0,264	170 @ 0,185	0,259	5